



## COSTA VERDE ACCESSES AND FOOTBRIDGES

### CONTRACT DATA

#### ADMINISTRATIVE DATA

**CONTRACT TYPE:**

Drafting of Detailed Project

**CONTRACT NAME:**

"Construction and Improvement of the Stairways and Footbridges at the Costa Verde, San Isidro-Miraflores-Barranco Stretch-Province of Lima-Lima"

**LOCATION:** Lima (Peru)

**CONSULTING COMPANY:**

CPS Ingenieros, Obra Civil y Medio Ambiente, S.L.

**BUDGET:** S/.496.000,00

**WORKS BUDGET:** S/29.680.090,59

**CLIENT:** EMAPE S.A.

**DATE (START / COMPLETION):** December 2012-October 2013

#### TECHNICAL DATA

DISTRITO	BAJADA	LONG RAMPAY ESCALERA (m)	ANCHO LIBRE RAMPAY (m)	LONG PUENTE (m)
San Isidro	San Isidro	750	2.4	70
	Estadio	230	2.4	43
Miraflores	María Reich	165	2	46
	Isaac Rabin	270	2	47.3
	Clubes	0	2	86
Barranco	Baños	93	2.3	38.7


### SCOPE OF THE WORKS

The project consists of the implementation of 6 walkways connecting the Beach Circuit with the Costa Verde within the city of Lima, these connecting paths called "stairways" or "bajadas" are located in the districts of San Isidro, Miraflores and Barranco

### TASKS PERFORMED

- Topographic Data
- Evaluation of the current road status
- Road Design
- Traffic Study
- Soil and Pavings Study
- Structures Calculation
- Signalling and Road Safety
- Measurements, Technical Specifications, Price analysis, Budget and Execution Schedule
- Environmental Impact Study
- Inferences Evaluation

### SITUATION

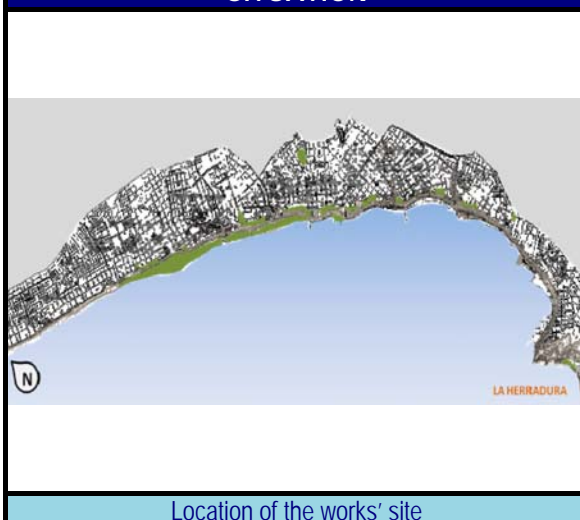

### LOCATION



## WORKS DESCRIPTION



The construction of 6 pedestrian accesses is planned by building 2 new stairways or ramps with their respective footbridges and the improvement of 4 other stairways or ramps, including the construction of their respective footbridges.

A small square will be constructed at each beach access point housing public washrooms, benches, litter bins, bicycle parks and additional urban furniture.



San Isidro Stairway



Baños Stairway



Reich Stairway



Rabin Stairway